


# PROPEX PAVING PRODUCTS

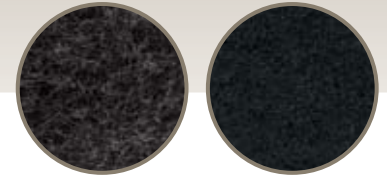

Our Petromat® and Petrotac® paving products are designed to extend the life of highways, city streets, parking areas and airport pavements. These easily installed interlayer products address specific pavement problems by providing a moisture barrier against water intrusion and a stress absorbing membrane to retard reflective cracking. They also lower the life-cycle cost of pavements by improving performance and reducing maintenance.

## FEATURES & BENEFITS

- ▶ Absorbs and dissipates stresses in the pavement to reduce reflective and fatigue cracking
- ▶ Minimizes water infiltration through the pavement
- ▶ Used in new and existing pavements
- ▶ Easy to handle and install
- ▶ Knowledgeable technical support


Outperforms and is more cost-effective than conventional pavement technologies including:

- ▶ Milling + Overlay
- ▶ Thicker overlays
- ▶ Expensive specialty mixes
- ▶ Surface treatments

## PROPEX PAVING PRODUCT FAMILY TABLE

PETROMAT®	PETROTAC®
4597	4591
4598	
4599	

REDUCTION IN OVERLAY REFLECTIVE CRACKING WITH THE PETROMAT® SYSTEM COMPARED TO CONTROL SECTIONS WITH NO FABRIC

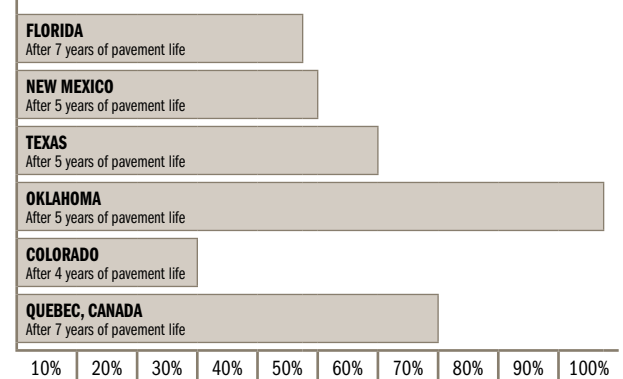

## APPLICATION RECOMMENDATIONS FOR PROPEX PAVING PRODUCTS

APPLICATIONS	PAVING STYLE
Use as moisture barrier and stress absorbing interlayer beneath asphalt overlay or a chip seal	Petromat® 4597 Petromat 4598 Petromat 4599
Use as strip membrane to treat local pavement distress and joints and cracks; effective over moderate cracks/joints	Petrotac® 4591
Use as bridge deck membrane moisture barrier	Petrotac 4591

## PETROMAT® PROPERTY TABLE<sup>1</sup> ENGLISH & METRIC UNITS

	PROPERTY	TEST METHOD	VALUE <sup>3</sup>	UNIT	<u>4597</u>	<u>4598</u>	4599
MECHANICAL	UNIT WEIGHT	ASTM D-5261	MARV	oz/yd <sup>2</sup> g/m <sup>2</sup>	4.6 156	4.1 140	3.6 122
	GRAB TENSILE STRENGTH	ASTM D-4632	MARV	lb N	120 530	101 450	90 400
	GRAB ELONGATION	ASTM D-4632	MARV	%	50	50	50
	MULLEN BURST	ASTM D-3786	MARV	psi kPa	230 1580	200 1370	180 1240
	ASPHALT RETENTION	ASTM D-6140	MARV	gal/yd <sup>2</sup> l/m <sup>2</sup>	0.24 1.1	0.20 0.90	0.20 0.90
ENDURANCE	UV RESISTANCE	ASTM D-4355	MARV	% Retained @ 150 hours	70	70	70

NOTES: 1. The property values listed are effective 08/2006 and are subject to change without notice. 2. Values reported in weaker principal direction. 3. All values listed are Minimum Average Roll Values (MARV) unless otherwise noted, calculated as the typical minus two standard deviations. Statistically, it yields a 97.7% degree of confidence that any sample taken during quality assurance testing will exceed the value reported. 4. Petromat is heat set on the top side to facilitate installation. 5. Underlined styles meet and/or exceed the American Association of State Highway Transportation Officials (AASHTO) M288-05 specifications.

## PETROTAC® PROPERTY TABLE<sup>1</sup> ENGLISH & METRIC UNITS

	PROPERTY	TEST METHOD	VALUE <sup>2</sup>	UNIT	4591
MECHANICAL	STRIP TENSILE	ASTM D-882 (modified)	MARV	lb/in N/m	50 8760
	PUNCTURE RESISTANCE	ASTM E-154	MARV	lb N	200 890
ENDURANCE	PERMEANCE-PERMS	ASTM E-96 method B	MARV	max	0.05
	PLIABILITY- 1/4" Mandrel 180° blend at -25°F	ASTM D-146 (modified)	MARV	—	No cracks in fabric or rubberized asphalt

NOTES: 1. The property values listed are effective 08/2006 and are subject to change without notice. 2. All values listed are Minimum Average Roll Values (MARV) unless otherwise noted, calculated as the typical minus two standard deviations. Statistically, it yields a 97.7% degree of confidence that any sample taken during quality assurance testing will exceed the value reported. 3. Petrotac has a unique top coating of asphalt on the top side to ensure a good bond to the overlay.

For downloadable documents like construction specifications, installation guidelines, case studies and other technical information, please visit our web site at [geotextile.com](http://geotextile.com). These documents are available in easy-to-use Microsoft® Word formats.



THE ADVANTAGE CREATORS.™

Propex Inc.  
6025 Lee Highway, Suite 425  
PO Box 22788  
Chattanooga, TN 37422

PH: 423 899 0444  
PH: 800 621 1273  
FAX: 423 899 7619  
[www.geotextile.com](http://www.geotextile.com)

Geotex®, Landlok®, Pyramat®, X3®, SuperGro®, Petromat® and Petrotac® are registered trademarks of Propex Inc.

THIS PUBLICATION SHOULD NOT BE CONSTRUED AS ENGINEERING ADVICE. WHILE INFORMATION CONTAINED IN THIS PUBLICATION IS ACCURATE TO THE BEST OF OUR KNOWLEDGE, PROPEX DOES NOT WARRANT ITS ACCURACY OR COMPLETENESS. THE ULTIMATE CUSTOMER AND USER OF THE PRODUCTS SHOULD ASSUME SOLE RESPONSIBILITY FOR THE FINAL DETERMINATION OF THE SUITABILITY OF THE INFORMATION AND THE PRODUCTS FOR THE CONTEMPLATED AND ACTUAL USE. THE ONLY WARRANTY MADE BY PROPEX FOR ITS PRODUCTS IS SET FORTH IN OUR PRODUCT DATA SHEETS FOR THE PRODUCT, OR SUCH OTHER WRITTEN WARRANTY AS MAY BE AGREED BY PROPEX AND INDIVIDUAL CUSTOMERS. **PROPEX SPECIFICALLY DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, OR ARISING FROM PROVISION OF SAMPLES, A COURSE OF DEALING OR USAGE OF TRADE.**